

TABLE OF CONTENTS

PANEL#

- 1 - Safety Instructions / Glossary
- 2 - Charge the Headset
- 3 - Battery Power Indicators
- 4 - Headset Controls
- 5 - Turn Headset Off / On
- 6 - Pair Headset with the Phone
- 7 - Microphone Positioning
- 8 - Make a Call / End a Call
- 9 - Answer a Call / End a Call
- 10 - Pairing with a Computer
- 11 - Pairing with a Computer - continued
- 12 - Last Number Redial
- 12 - Reject a Call
- 12 - Resetting the Paired Devices List
- 13 - Voice Dial
- 13 - Transfer Audio
- 14 - Turn Headset Indicator Lights Off/On
- 14 - Reconnect on Power Up
- 15 - Multiple Device Pairing
- 16 - Specifications

1 SAFETY INSTRUCTIONS/GLOSSARY

- Avoid hearing damage. Set volume at lowest comfortable level. If you experience ringing in your ears or people sound muffled, stop using the headset. Avoid turning up volume to block noisy surroundings (it's possible to adapt to volume that is too high).
- Check with local and state laws regarding cell phone handset/headset usage while operating a motor vehicle.
- Replace only with same or equivalent battery.
- Dispose of batteries according to local regulations.
- Do not throw batteries in a fire, as they could explode.
- Do not immerse any part of this product in water.
- Plastic bags and small parts may cause choking if ingested. Keep them away from small children and pets.
- Use only the power cords included with this product.

Glossary of Terms

Paired- Two Bluetooth enabled devices agree to communicate with one another.

On - Headset is powered on but there is no active Bluetooth connection to the phone.

Standby Mode - Headset is paired and connected (active Bluetooth link) to the cellular phone, ready for an incoming or outgoing call.

Talk Mode- Headset is being used with the cell phone while the cell phone is on an active call.


2 CHARGE THE HEADSET

1. Select the AC or DC charger and plug it into the charger port on the headset, as shown.
2. Plug the charger into the power source and charge headset undisturbed for **12 full hours before first use.**
3. When the charger plug is removed from the headset there is a 4 second delay before the headset turns on.



The B250 headset's Multifunction Button (MFB) indicator lights might turn from red to green before the 12 hours pass. Even so, do not use the headset before the 12 hour charge is complete. Failure to follow this instruction may result in shorter battery life.

3 BATTERY POWER INDICATORS



Green or Red Light

Headset may become warm while charging. This is normal. However, if the unit becomes uncomfortably warm, discontinue use and call VXI at 1-800-742-8588 for assistance.

After the initial charge of 12 hrs., the headset's indicator lights will indicate the level of battery power as follows:


Green light: Headset is at least 75% charged

Red light: Less than 75% charge

Low Battery Warning: When the battery is near the end of its charge, you'll hear 2 beeps every 10 sec. The headset will have 2-15 min. before shutting off. When headset shuts off, audio will transfer to the phone. It is recommended, when you hear the low battery warning, that you transfer audio to the cell phone by pressing the volume down button for 1-2 sec. and continue the call using the handset (read Safety Instructions). Place the headset on the charger to re-charge.

TIP For best battery performance, keep charging headset when not in use.

4 HEADSET CONTROLS

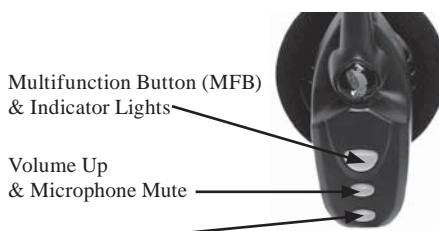

Volume Increase: Quickly press and release the Volume Up/Mute button. Repeat until desired volume is attained.

Volume Decrease: Quickly press and release the Volume Down button. Repeat until desired volume is attained.

Microphone Mute/Un-Mute: Hold down the Volume Up/Mute button for 2 seconds until you hear a beep. The microphone will mute and a reminder beep will be heard every 10 seconds while in mute mode. Repeat the 2-second press to un-mute.

5 TURN HEADSET OFF / ON

Turn Headset Off (conserves battery power)

Hold down the MFB for 2-3 seconds until you hear 2 falling tones. The yellow light will stop flashing and the headset will turn off.

TIP Keep charger plugged into headset when not in use to avoid battery drain. It's not necessary for the charger to be plugged into a power source to take advantage of this benefit.

Turn Headset On

Hold down the MFB for 2-3 seconds until you hear 2 rising tones. The yellow light will flash every 4 sec. Note: After the headset is turned on, it will attempt to connect to the last device that it was paired or connected with if that device is available, i.e. powered on and within range. Otherwise, the headset will remain in the 'on' state.

Standby Mode

Reminder - On is not the same as Standby Mode (see glossary). The headset is in Standby Mode when paired and connected (active Bluetooth link) to the cellular phone, ready for an incoming or outgoing call.

6 PAIR HEADSET WITH THE PHONE

Keep headset & phone no more than 3 feet apart while pairing and keep all other Bluetooth devices at least 50 ft. away or turn them off. Note: The headset can be paired with up to 8 different devices. Pairing is done just once and not every time a different device is used.

1. Remove headset from charger and turn it off (panel 5). The yellow light on the headset's MFB should not be flashing (watch for 5-7 seconds to be sure it's off).
2. Hold down the headset's MFB until the red and yellow lights flash. You will hear 2 rising tones, followed by 4 more tones. Important: Wait for all tones and for both lights to flash. This may take up to 15 sec. Release the MFB.
3. Follow the manufacturer's instructions for putting your cellular phone into Bluetooth discovery mode.
4. Wait 5-15 sec. while the devices discover each other. When the phone discovers the headset (VXI B250), select "Pair" and enter a pass code of 0000 when instructed. When pairing is complete the headset's red light will stop flashing and the phone will prompt you to 'connect' to the headset. Enter Yes on the phone to connect to the headset. **The headset is now in standby mode ready to receive a call.**

7 MICROPHONE POSITIONING



Position the microphone near the corner of your mouth, just below your bottom lip. The word TALK is embossed on the microphone (under the microphone cushion). This mark must face your mouth.



Correct microphone positioning is important to ensure that the microphone's noise cancellation technology works properly. Slight adjustment of the microphone, either toward or away from your mouth, may help to achieve optimum performance.

8 MAKE A CALL / END A CALL

If you have not paired the headset and phone together yet, you must do so (panel 6). Remember, in order to make a call, the headset must be in standby mode.

1. Turn on your cell phone. Note: Be sure the Bluetooth option is enabled on your phone. Refer to your phone's user guide for instruction.
2. Remove the headset from the charger, put it on your head and properly position the microphone (panel 7). The headset will automatically attempt to connect with the last device it was paired or connected with.
3. Once connected, the headset will enter standby mode. Dial the phone and make a call as usual.
4. To end the call, quickly press the MFB on the headset and release. You will hear 2 falling tones; the call will terminate and the headset will enter standby mode.

9 ANSWER A CALL / END A CALL

In order to receive a call, the headset must be in standby mode.

1. Place the headset on your head and properly position the microphone (panel 7).
2. When your cell phone rings, you should hear the ring tones in the headset. Answer the call by quickly pressing the headset's MFB and release.
3. To end the call, quickly press the MFB on the headset and release. You will hear 2 falling tones; the call will terminate and the headset will revert to standby mode.

10 PAIRING WITH A COMPUTER

Keep headset & computer no more than 3 feet apart while pairing and keep all other Bluetooth devices at least 50 ft. away or turn them off. Note: The headset can be paired with up to 8 different devices. Pairing is done just once and not every time a different device is used.

1. Remove the headset from charger and turn it off (panel 5). The yellow light on the headset's MFB should not be flashing (watch for 5-7 seconds to be sure it's off).
2. Open the Bluetooth connection manager application on your computer. The Bluetooth connection manager application is supplied by the PC or dongle manufacturer, not VXI.
3. Put headset into pairing mode (see Panel 6- Step 2).
4. Instruct the Bluetooth connection manager application to discover Bluetooth devices. Enter a pass code of 0000 when prompted (refer to the device's user manual for detailed instructions).

Continued on panel 11

11 PAIRING WITH A COMPUTER

Continued

5. Wait 5-15 seconds while the devices discover each other. The headset's red light will stop flashing and the yellow light will continue to flash. After pairing is complete, the Bluetooth computer will 'ring' the headset. Press and release the MFB once to connect (establish a Bluetooth link) to the computer. Press and release the MFB again to disconnect from the computer.

NOTE: The connection can be initiated from the headset by pressing the volume down button for 1-2 seconds. Tones will be heard and a connection should be established.

FUNCTIONS AND INDICATORS AT A GLANCE

Function	Button/Duration of press (MFB = Multifunction Button)	Audio Indicator	Visual Indicator
Power on	MFB / 2-3 sec.	Two rising tones	Yellow light flashes every 4 sec.
Power off	MFB / 2-3 sec.	Two falling tones	All lights go off
Enter pairing mode	MFB / 5-15 sec.	Two + Four rising tones	Red & yellow lights flash <i>alternately</i>
Standby Mode	MFB / 1 sec. (after Power On)	One long tone	Yellow light flashes every 1 sec.
Volume up	Vol Up / quick press	Single tone	None
Volume down	Vol Dwn / quick press	Single tone	None
Mute on	Vol Up / 2 sec.	Single tone	None
Mute off	Vol Up / 2 sec.	Single tone	None
		<i>(Short reminder beep every 10 seconds while mute is on)</i>	
Voice dial (start)	MFB / 1 quick press	Single tone	None
Voice dial (end)	MFB / 1 quick press	Single tone	None
Last number redial	Vol Dwn / 1 sec.	Single tone	None
Answer a call	MFB / quick press	Two rising tones	Yellow light flashing every 1 sec.
End a call	MFB / quick press	Two falling tones	Yellow light flashing every 1 sec.
Reject a call*	MFB / 2 sec.	Two falling tones	None
	<i>*Sends call to Voice Mail (if available)</i>		
Transfer audio	Vol Dwn / 1-2 sec.	Long tone	None

blueparrott® B250 USER GUIDE



Compatible with Bluetooth phones & Bluetooth enabled computers (Windows® or Macintosh®)

12 ADDITIONAL FUNCTIONS

Note: Your cell phone must support the following functions. If unsure whether your phone supports these features, consult the phone owner's manual.

LAST NUMBER REDIAL (when not on a call)

To re-dial the last number that was dialed from the cell phone, press and hold the VOL DWN button for approximately 1 sec. A beep will be heard and the phone will redial the last number.

REJECT A CALL (when not on a call)

To reject an incoming call, press and hold the MFB for 2 seconds. You will hear 2 falling tones and the incoming call will be transferred to your voicemail (if available).

RESETTING THE PAIRED DEVICES LIST

The headset keeps track of the devices that it has been paired with, this list is called the Paired Devices List. There may be an occasion when the headset's Paired Devices List must be cleared. To clear the headset's Paired Devices List, the headset must be powered on. Press the Volume Up and Volume Down buttons at the same time for 6 seconds. When you hear the double beep, the list will be cleared.

15 MULTIPLE DEVICE PAIRING

Your headset can store pairing information for up to eight different Bluetooth devices. Devices are stored in a "Paired Device List" in order of pairing. Any of the eight paired devices can initiate a paired connection to the headset.

The headset will only automatically initiate a paired connection (via cycling power to the headset or pressing the MFB) with the last device it was connected to. If you want to connect the headset to another device in the paired device list, you must initiate the connection from that device or turn off all other devices except the one you want to connect to. Whichever of the eight devices initiates a connection to the headset afterwards, that device then becomes the "last connected" device.

13 ADDITIONAL FUNCTIONS

Note: Your cell phone must support the following functions. If unsure whether your phone supports these features, consult the phone owner's manual.

VOICE DIAL

To use the voice dial feature of the cell phone, quickly press the MFB on the headset; a tone will be heard and the phone's voice dialer should open; clearly speak the command. Repeat quick press of the MFB to end voice dial. The headset must be in standby mode to use this feature.

TRANSFER AUDIO

To transfer audio from the headset to the cell phone while on a call, press and hold the volume down button for 1-2 seconds. A tone will be heard and audio will transfer to the phone; repeat to transfer audio back to the headset. When audio is transferred to the phone, all headset activity (lights and sounds) will stop until audio is transferred back to the headset.

14 ADDITIONAL FEATURES

TURN HEADSET INDICATOR LIGHTS OFF/ON

To turn the headset indicator lights off or on, quickly press both the volume up and volume down buttons at the same time. A tone will be heard and the indicator lights will turn off; repeat to turn the indicator lights on. To use this feature the headset must be in standby mode or on an active call (or connected to a Bluetooth enabled computer or dongle) The default state of the indicator lights upon power up is on.

RECONNECT ON POWER UP

When the headset is powered on, it will attempt to connect to the last device it was paired with. If the headset was paired with multiple devices and the last connected device is not available (turned off, out of range, etc.), the headset will attempt to connect to the second to the last device it was connected to, etc. It is also possible to reconnect to the device by pressing the headset's MFB for 1 second. A tone will be heard and the two devices should connect.

16 SPECIFICATIONS

Range: Up to 66 ft. Note- Best range is achieved with line-of-sight positioning of headset and cell phone.

Certain conditions and obstructions, such as wireless devices, walls, etc., can inhibit radio wave transmission and reduce range.

Talk Time Duration: 10+ hours on a 12 hour charge.

Standby Time Duration: Up to 100 hours on a 12 hr. charge.

Auto (DC) Charger Inline Fuse

Replacement: If neither of the headset charging indicators light when the auto adapter is connected to the headset and power source, check the charger's inline fuse. Replace with 1A 250V Slow-Blow glass fuse (3AG) if necessary. Fuses are available at most automotive stores. To replace, simply unscrew the tip of the auto adapter (see photo, right) and remove the fuse (be careful not to lose the spring that is inside). Put new fuse in and screw the tip back on.



FCC NOTICE TO USERS

This part complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Users are not permitted to make changes or modify the device in any way. Changes or modifications not approved by VXI Corporation will void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antennae
- Increase the separation between the equipment and the receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CANADA / IC NOTICE TO USER

Operation is subject to the following two conditions: 1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation of the device. The term "IC" before the certification / registration number only signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

LIMITED WARRANTY

- VXI warrants that your B250 headset system will be free from defects in material and workmanship for one year from the date of purchase. If, during the first year from the date of purchase, your B250 headset system fails to work due to a defect in material or workmanship, VXI will repair or replace the product, at its election, free of charge (shipping costs to VXI not included - see #3). You may register your warranty online at www.vxicorp.com or by calling customer service at 800-742-8588. Without proof of purchase, the warranty period begins on the date of manufacture. Consumable components (for example, cushions, battery and fuse) are not included in this warranty.
- The foregoing limited warranty does not cover equipment failure attributable to accident, improper operation, misuse, abuse, or any cause other than defects in the materials or workmanship of VXI's products.
- VXI's obligations under this warranty are limited to repair or replacement (at our option) of any defective part returned to VXI at the customer's expense. Returned products require a Return Authorization (RA) number that *must* be written on the outside of the box (to avoid package refusal). RA numbers may be obtained by calling 1-800-742-8588. Products returned to VXI for repair under this warranty will be return shipped to the customer at VXI's expense.
- THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not permit the exclusion of implied warranties and the foregoing exclusions may not apply to you.
- In no event shall VXI be responsible for any other damages whatsoever, including direct, indirect, special, incidental, consequential, or other damages for breach of this or any other warranty, express or implied.